

BC WIRE ROPE

Quality, No Compromise Since 1974




BC Wire Rope & Rigging is a full-service Rigging Loft incorporated in 1974. Our 'Quality, No compromise' philosophy has enabled us to grow throughout the many industries we serve. With corporate headquarters in Anaheim, CA, and branch locations in San Diego, CA, Tucson, AZ, Las Vegas, NV, and Elko, NV, BC Wire Rope & Rigging is committed to keeping our customers' jobs running smoothly. We do this by having in-house manufacturing, sufficient inventory, and a knowledgeable staff.

BC Wire Rope & Rigging is proud to offer the very best products in the industry. An authorized Distributor of Crosby, Bridon, and SlingMax products, we maintain a full inventory of products. We also provide products from other manufacturers depending on our customers' needs.

Bridon 6X19 Standard Wire Rope

Bridon 6×19 Wire Rope is general purpose 6 stranded galvanized ropes produced with a steel core, fully lubricated during manufacture producing in accordance with EN 12385.

- High Quality six strand rope
- High Strength – confirmed by Bridon's "Powercheck" testing of a sample
- Excellent resistance to wear
- Fully Lubricated
- Steel Core, Fibre Core

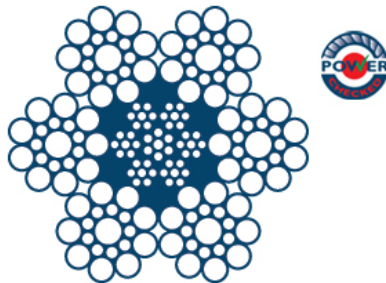

BRIDON

Diameter		Approx. mass IWRC		Min. breaking force			
in	mm	lb/ft	kg/ft	EIP IWRC		EEIP IWRC	
				tons	kN	tons	kN
1/4		0.12	0.05	3.40	30.3		
	7	0.14	0.06	3.80	34.2	4.2	37.7
5/16		0.18	0.08	5.27	46.9		
	8	0.18	0.08	5.00	44.7	5.5	49.2
	9	0.23	0.11	6.40	56.5	7.0	62.3
3/8		0.26	0.11	7.55	67.2		
	10	0.29	0.13	7.80	69.8	8.3	76.9
	11	0.35	0.16	9.50	84.4	10.5	93.0
7/16		0.35	0.15	10.20	90.7	11.2	99.6
	12	0.41	0.19	11.40	101.0	12.4	110.7
1/2		0.46	0.20	13.30	118.4	14.6	129.9
	13	0.48	0.22	13.30	118.0	14.6	130.0
	14	0.56	0.25	15.40	137.0	17.0	151.0
9/16		0.58	0.26	16.80	149.5	18.5	164.7
5/8		0.72	0.32	20.60	183.3	22.7	202.0
	16	0.73	0.33	20.10	179.0	22.1	197.0
	18	0.93	0.42	25.40	226.0	28.0	249.0
	19	1.03	0.47	28.30	252.0	31.2	278.0
3/4		1.04	0.46	29.40	261.7	32.4	288.4
	20	1.15	0.52	31.40	279.0	34.6	308.0
	22	1.39	0.63	38.00	338.0	41.8	372.0
7/8		1.41	0.62	39.80	354.2	43.8	389.8
	24	1.65	0.75	45.20	402.0	49.8	443.0
1		1.85	0.82	51.70	460.1	56.9	506.4
	26	1.94	0.88	53.10	472.0	58.4	520.0
	28	2.24	1.02	61.50	547.0	67.8	603.0
1 1/8		2.34	1.03	65.00	578.5	71.5	636.4
1 1/4		2.89	1.28	79.90	711.1	87.9	782.3
	32	2.93	1.33	80.40	715.0	88.5	787.0
1 3/8		3.49	1.54	96.00	854.4	106.0	943.4
	36	3.71	1.68	101.60	904.0	112.1	997.0
1 1/2		4.16	1.84	114.00	1014.6	125.0	1112.5
	40	4.58	2.08	125.90	1120.0	138.3	1230.0

NOTE: MBF listed in tables for metric ropes in EIP column are 1960 Grade and in EEIP column are 2160 Grade.
NOTE: Sizes 1/4" to 1" Powerchecked

CALL BC WIRE ROPE