

BC WIRE ROPE


Quality, No Compromise Since 1974



BC Wire Rope & Rigging is a full-service Rigging Loft incorporated in 1974. Our 'Quality, No compromise' philosophy has enabled us to grow throughout the many industries we serve. With corporate headquarters in Anaheim, CA, and branch locations in San Diego, CA, Tucson, AZ, Las Vegas, NV, and Elko, NV, BC Wire Rope & Rigging is committed to keeping our customers' jobs running smoothly. We do this by having in-house manufacturing, sufficient inventory, and a knowledgeable staff.

BC Wire Rope & Rigging is proud to offer the very best products in the industry. An authorized Distributor of Crosby, Bridon, and SlingMax products, we maintain a full inventory of products. We also provide products from other manufacturers depending on our customers' needs.

Crosby S-1316 SHUR-LOC Eye Hooks

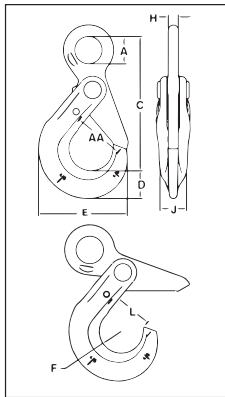

- Crosby S-1316 SHUR-LOC Eye Hooks are Grade 100 SHUR-LOC Hooks
- Forged Alloy Steel – Quenched and Tempered.
- 25% stronger than Grade 80.
- Individually Proof Tested to 2-1/2 times the Working Load Limit with certification
- Recessed trigger design is flush with the hook bod , protecting the trigger from potential damage.
- Easy to operate with enlarged thumb access.
- Positive Lock Latch is Self-Locking when hook is loaded.
- Eye style is designed with “Engineered Flat” to connect to S-1325 chain coupler.
- Suitable for use with Grade 100 and Grade 80 chain.
- The SHUR-LOC® hook, if properly installed and locked, can be used for personnel lifting applications and meets the intent of OSHA Rule 1926.1431(g)(1)(i)(A) and 1926.1501(g)(4)(iv)(B).
- Fatigue rated at 1-1/2 times the Working Load Limit at 20,000 cycles.
- “Look for the Platinum Color – Crosby Grade 100 Alloy Products.”
- Forged Alloy Steel – Quenched and Tempered.



SHUR-LOC® Hook Series with Positive Locking Latch S-1316 Eye Hook

Chain Size		Working Load Limit (lb)*	S-1316 Stock No.	Weight Each (lb)	Dimensions (in)								
(in)	(mm)				A	C	D	E	F	H	J	L	AA
-	6	3200	1022896	.85	.78	3.95	.79	2.60	.67	.31	.63	1.14	1.50
1/4-5/16	7-8	5700	1022914	1.80	1.08	5.31	1.10	3.50	.87	.39	.81	1.48	2.00
3/8	10	8800	1022923	3.40	1.30	6.57	1.17	4.39	1.10	.51	.94	1.83	2.50
1/2	13	15000	1022932	6.00	1.65	8.23	1.67	5.45	1.26	.67	1.16	2.22	3.00
5/8	16	22600	1022941	15.1	2.20	10.06	2.04	6.56	1.50	.87	1.50	2.65	3.50
3/4	18-20	35300	1022942	19.0	2.60	10.77	2.22	7.76	2.01	.87	2.03	3.52	5.00
7/8	22	42700	1022943	28.0	2.87	12.49	2.45	8.75	2.27	.98	2.20	3.83	6.00
1	26	59700	1022944	49.5	3.15	14.60	3.21	9.87	2.46	1.26	2.68	4.09	6.50

* Minimum Ultimate Load is 4 times the Working Load Limit.

CALL BC WIRE ROPE

800-669-5919